


1.	Name and unique identification code of the product-type:	Panel PIR F ALU-T Polyisocyanurate rigid foam (PIR) panels faced, both sides, with an embossed aluminum foil 50µm.
2.	Intended uses of the construction product:	Thermal insulation for buildings (ThIB). Thermal insulation for deck type metal roofing.
3.	Manufacturer:	Poliuretanos, S.A. Z.I. El Trust, Ctra. C-65, km 16 17244 Cassà de la Selva - Girona (Spain) Tel. +34 972 46 04 72 Fax. +34 972 46 17 19 e-mail: info@poliuretanos.com
4.	System of assessment and verification of constancy of performance of the construction product (AVCP):	AVCP 1 (Reaction to fire) AVCP 3 (Other properties)
5.	Harmonised standard: Notified body/ies: Notified laboratory/ies:	EN 13165:2012+A2:2016 Bureau Veritas Certification S.A.U. , Notified body nº 1035. Centre Scientifique et Technique du Bâtiment (CSTB) , notified testing laboratory N° 0679. APPLUS LGAI Technological Center , notified testing laboratory N° 0370.

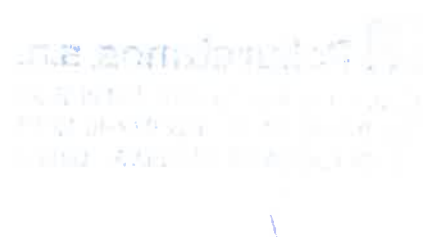

6. Declared performance

<i>Essential characteristics</i>	<i>Performance</i>											
Reaction to fire	30 ≤ d _N ≤ 120mm											
Reaction to fire – end use	Thermal insulation for deck type metal roofing	C-s2,d0										
Water permeability	Water absorption short term	B-s2,d0 Standard assembly n°3										
	Water absorption long term	NPD WL(T)1										
	Flatness after one-sided wetting	NPD										
Release of dangerous substances to the indoor environment	No harmonised test method available											
Acoustic absorption index	Sound absorption	NPD										
Direct airborne sound insulation index	Sound absorption	NPD										
Continuous glowing combustion	No harmonised test method available											
Thermal resistance	Thermal resistance R _D (m ² ·K/W)	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">d_N:30mm R_D=1,30</td> <td style="width: 33%;">d_N:80mm R_D=3,50</td> </tr> <tr> <td>d_N:40mm R_D=1,75</td> <td>d_N:90mm R_D=3,95</td> </tr> <tr> <td>d_N:50mm R_D=2,20</td> <td>d_N:100mm R_D=4,40</td> </tr> <tr> <td>d_N:60mm R_D=2,65</td> <td>d_N:110mm R_D=4,85</td> </tr> <tr> <td>d_N:70mm R_D=3,05</td> <td>d_N:120mm R_D=5,30</td> </tr> </table>	d _N :30mm R _D =1,30	d _N :80mm R _D =3,50	d _N :40mm R _D =1,75	d _N :90mm R _D =3,95	d _N :50mm R _D =2,20	d _N :100mm R _D =4,40	d _N :60mm R _D =2,65	d _N :110mm R _D =4,85	d _N :70mm R _D =3,05	d _N :120mm R _D =5,30
	d _N :30mm R _D =1,30	d _N :80mm R _D =3,50										
	d _N :40mm R _D =1,75	d _N :90mm R _D =3,95										
d _N :50mm R _D =2,20	d _N :100mm R _D =4,40											
d _N :60mm R _D =2,65	d _N :110mm R _D =4,85											
d _N :70mm R _D =3,05	d _N :120mm R _D =5,30											
Thermal conductivity λ _D (W/m·K)	0,023											
Thickness d _N : 30-120	T2											
Water vapour permeability	Water vapour transmission	NPD										
Compressive strength	e ≤ 45mm	CS(10Y)175										
	e ≥ 50mm	CS(10Y)200										
Tensile strength / flexion	Tensile strength perpendicular to faces	NPD										
Durability of reaction to fire against heat, weathering, ageing / degradation	Reaction to fire does not change with time											
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal resistance and thermal conductivity	(a)										
	Durability of thermal resistance against ageing/degradation	(a)										
	Dimensional stability under specified temperature and humidity conditions	DS(70,90)3										
	Deformation under specified compressive load and temperature conditions	NPD										
	Methods for determination of the values of thermal resistance and thermal conductivity after ageing	(a)										
Durability of compressive strength against ageing/degradation	Compressive creep	NPD										

^(a) The declared value of thermal conductivity incorporates the effect of aging over time extrapolated to 25 years.

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) n° 305/211, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:


Poliuretanos, s.a.

Ctra. C-65, Km. 16 - Pol. Ind el Trust
Tel. 972 46 04 72 - Fax 972 46 17 19

F. Bolla
General Manager

Cassà de la Selva, 14.09.2017